



SJ8831 RT | SJ8841 RT ROUGH TERRAIN SCISSOR LIFTS

Skyjack's Full-Size Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities— all in one package! The SJ8831 RT and SJ8841 RT feature working heights of 11.45 m and 14.50 m respectively. Both models are equipped with standard independent/auto leveling outriggers, are drivable at full height, with capacities ranging to 909 kg allowing for maximized productivity.

An easily accessible Kubota diesel engine powers a robust axle based 4WD system with "no-spin" and limited slip differentials, delivering excellent job site terrainability.



SKYJACK™

ROUGH TERRAIN SCISSOR LIFTS

SPECIFICATIONS

SJ8831 RT

SJ8841 RT

2006/42/CE

A Work Height	11.45 m	14.50 m
B Raised Platform Height	9.45 m	12.50 m
C Lowered Platform Height	1.50 m	1.75 m
D Overall Width	2.20 m	2.20 m
E Overall Length	3.53 m	3.53 m
F Stowed Height (Rails Up)	2.67 m	2.90 m
G Stowed Height (Rails Down)	1.99 m	2.22 m
H Platform Width (Inside Dimension)	1.70 m	1.70 m
Platform Length Stowed (Inside Dimension)	3.40 m	3.40 m
I Platform Length Extended (Inside Dimension)	5.70 m	5.70 m
Ground Clearance	0.20 m	0.20 m
Wheelbase	2.27 m	2.27 m
Weight	5684 kg	6173 kg
Gradeability	30%	30%
Turning Radius (Inside)	4.01 m	4.01 m
Turning Radius (Outside)	6.30 m	6.30 m
Lift Time (With Rated Load)	46 sec	71 sec
Drive Speed (Stowed)	4.5 km/h	4.5 km/h
Drive Speed (Raised)	0.4 km/h	0.4 km/h
Maximum Drive Height	Full	Full
Capacity (Overall)	909 kg	681 kg
Maximum # of Persons	6	5

STANDARD FEATURES


- Axle based 4WD
- "No Spin" rear differential and limited slip front differential
- Disc brake system on rear axle
- 29hp Kubota Diesel engine on roll out tray
- Independent/auto levelling outriggers
- Self-centering scissor design
- Dual 1.22 m roll out extension decks
- Analog control system
- Colour coded and numbered wiring system
- 30% Gradeability
- Grip lug, foam-filled tires
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- Overload sensing system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on sides
- Lanyard attachment points
- Scissor guards
- Tie down/lift lugs

OPTIONS†

- Dual 1.22 m powered extension decks
- Diesel scrubber
- Airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres
- All motion audible alarm

† Capacities, and machine weights may differ when options are added

Model	Capacity With 2 Extension Decks*		
	Main	Front Ext.	Rear Ext.
SJ 8831	454 kg	227 kg	227 kg
SJ 8841	227 kg	227 kg	227 kg

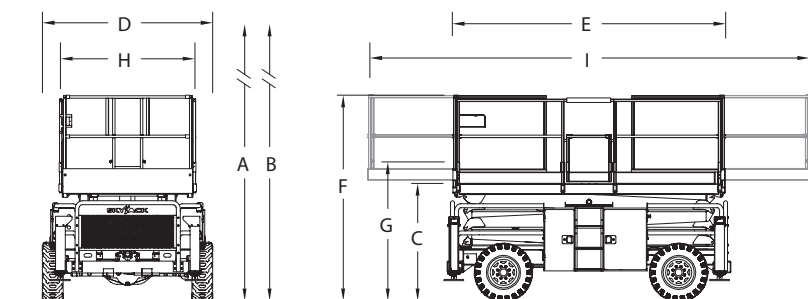

Skyjack Head Office

55 Campbell Rd. Guelph, ON Canada
N1H 1B9
Sales Inquiries: 1-877-755-4387
(1-877-SJLIFTS)
Main Switchboard: 1-800-265-2738
Phone: 1-519-837-0888
Fax: 1-519-837-8104
Email: skyjack@skyjack.com

www.skyjack.com

Skyjack UK

Unit 1, Maes-y-Clawdd
Maesbury Road Industrial Estate
Oswestry, Shropshire, SY10 8NN
Tel: +44 1691 676235
Fax: +44 1691 676239
Email: info@skyjackeurope.co.uk

Skyjack France

ZI Le Clairin
69700 Saint Romain en Gier
France
Tel. +33 (0) 4 78 73 53 32
Fax. +33 (0) 4 78 56 52 42

Skyjack Hebebühnen GmbH (Deutschland)

Därmanbusch 2a
58456 Witten
Tel: +49 (0)2302 20 26 909
Fax: +49 (0)2302 20 25 671

Skyjack AB (Sweden)

Marieholmsgatan 2
415 02 Göteborg
Sweden
Tel: +46 31212245
Fax: +46 31212066



SKYJACK™

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. CE marked work platforms are in conformance to Machinery Directive 2006/42/EC.

EU/ENG/03/2013