

Specifications

MODELS		GS™-2668 RT		GS™-3268 RT	
MEASUREMENTS		Metric	US	Metric	US
Working height maximum*		9.92 m	32 ft	11.75 m	38 ft
A Platform height maximum		7.92 m	26 ft	9.75 m	32 ft
B Platform length - outside		2.51 m	8 ft 3 in	2.51 m	8 ft 3 in
- extended		3.73 m	12 ft 3 in	3.73 m	12 ft 3 in
Slide-out platform extension deck		1.22 m	4 ft	1.22 m	4 ft
C Platform width - outside		1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Toeboard height		15 cm	6 in	15 cm	6 in
Platform height - stowed		1.19 m	3 ft 10.75 in	1.31 m	4 ft 3.75 in
D Height - stowed**		2.32 m	7 ft 7.5 in	2.45 m	8 ft 5 in
rails lowered		1.70 m	5 ft 7 in	1.83 m	6 ft
E Length - stowed		2.67 m	8 ft 9 in	2.67 m	8 ft 9 in
platform extended		4.10 m	13 ft 5.5 in	4.10 m	13 ft 5.5 in
with outriggers		3.28 m	10 ft 9 in	3.28 m	10 ft 9 in
F Width		1.73 m	5 ft 8 in	1.73 m	5 ft 8 in
G Wheelbase		1.85 m	6 ft 1 in	1.85 m	6 ft 1 in
H Ground clearance - centre		19 cm	7.5 in	19 cm	7.5 in

PRODUCTIVITY

Lift capacity	567 kg	1,250 lbs	454 kg	1,000 lbs
Drive speed - stowed	6.1 km/h	3.8 mph	6.1 km/h	3.8 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability-stowed***	40%	40%	35%	35%
Maximum outrigger levelling:				
front to back	6.6°	6.6°	6.6°	6.6°
side to side	10.6°	10.6°	10.6°	10.6°
Turning radius - inside	1.52 m	5 ft	1.52 m	5 ft
Turning radius - outside	3.68 m	12 ft 1 in	3.68 m	12 ft 1 in
Raise/lower speed	30/35 sec	30/35 sec	40/37 sec	40/37 sec
Controls	proportional	proportional	proportional	proportional
Drive	four wheel	four wheel	four wheel	four wheel
Tyres - rough terrain	30 x 60 cm	12 x 23.5 in	30 x 60 cm	12 x 23.5 in
Tyres - non-marking	23 x 55 cm	9 x 21.5 in	23 x 55 cm	9 x 21.5 in

POWER

Power source	Kubota diesel 20 hp (15 kW) Kubota petrol/LPG 23 hp (17 kW)		Kubota diesel 20 hp (15 kW) Kubota petrol/LPG 23 hp (17 kW)	
Fuel tank capacity	56.8 L	15 gal	56.8 L	15 gal
Hydraulic system capacity	62.5 L	16.5 gal	62.5 L	16.5 gal




WEIGHT****

	3,072 kg	6,772 lbs	3,762 kg	8,293 lbs
Weight modifiers for options:				
Outriggers	add 483 kg	1,064 lbs	483 kg	1,064 lbs
Generator	add 48 kg	105 lbs	48 kg	405 lbs

STANDARDS COMPLIANCE

CE EN280, PB-10-611-03

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tyres; deduct 5.8 cm (2 in) for turf and non-marking tyres.
 *** Gradeability applies to driving on slopes. See Operator's Manual for details regarding slope ratings.
 **** Weight varies depending on options and country standards.

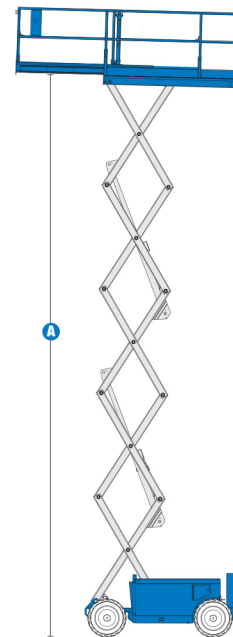

03/07 Part No. B109350UK

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2668RT

- 9.92 m (32 ft) working height
- Up to 567 kg (1,250 lb) lift capacity

GS™-3268RT

- 11.75 m (38 ft) working height
- Up to 454 kg (1,000 lb) lift capacity

PRODUCTIVITY

- Steel 2.51 x 1.55 m (8 ft 3 in x 5 ft 1 in) platform
- 1.22 m (4 ft) platform extension deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full-height swing gate
- 4x4
- Positive traction control
- Four-wheel braking
- Swing-out engine tray
- Foam-filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Certified load sensor

POWER

- Kubota diesel 20 hp (15 kW)



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Automatic levelling hydraulic outriggers
- Air line to platform
- Non-marking rough terrain tyres 30 x 60 cm (12 x 23.5 in)
- Dual flashing beacons
- Motion alarm
- Platform work lights

POWER

- Kubota petrol/LPG 23 hp (17 kW)
- 2000 watt generator (110 V/60 Hz)
- Cold start packages for all engines
- Hydraulic oil cooler
- LPG steel tank only, 15 kg (33.5 lb) capacity
- Additional LPG tank and carrier

European Offices

UK

The Maltings
Wharf Road
Grantham NG31 6BH
UK
Tel: +44 (0)1476 584333
Fax: +44 (0)1476 584334

France

10, ZA de la Croix St. Mathieu
28320 Gallardon
France
Tel: +33 (0)2 37 26 09 99
Fax: +33 (0)2 37 26 09 98

Germany

Finienweg 3
28832 Achim/Bremen
Germany
Tel: +49 (0)4202 8852-20
Fax: +49 (0)4202 8852-25

Spain

Gaià 31, Pol. Ind. Plà d'en Coll
08110 Montcada i Reixac
Barcelona
Spain
Tel: +34 93 572 50 90
Fax: +34 93 572 50 91

Scandinavia

Tagenevägen 72
425 37 Hisings Kärra
Sweden
Tel: +46 31 57 51 00
Fax: +46 31 57 90 20

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
USA
Tel: +1 425 881-1800
Fax: +1 425 883-3475

WEB: www.genieindustries.com
Email: infoeurope@genieind.com

For further information, please contact your local distributor or the Genie Industries sales office listed. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. Prices and specifications subject to change without notice. The only warranty applicable is the standard written warranty applicable to the particular product and sale. Genie makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. Copyright © 2007 Genie Industries, Inc. "Genie" is a Registered Trademark of Genie Industries, Inc. in the USA and many other countries. Genie is a Terex Company.

03/07 Part No. B109350UK

Zoomlift Ltd

Orchard House, Windmill Hill, Pudsey, Leeds, LS288JQ

T: 0333 011 3343

E: andrew@zoomlift.co.uk

Sales & Rental of New & Used Access Platforms, Forktrucks & Telehandlers

