




### **SSO507E** (Indoor Use / Outdoor Use)

- Optimization and match of hydraulic system delivers longer lasting performance
- Optimized electronic control system for better brake ability on a long downhill
- Improved steering mechanism reduces tire wear during turning
- Battery powered with zero emission and environmental-friendly

PRODUCT SPECIFICATION	SS0507E
Platform Capacity	230kg
Capacity On Deck Extension	113kg
Platform Occupants (Indoor)	2
Work Height	6.3m
Overall Length	1.53m
Overall Width	0.81m
Overall Height - Rails Down	1.9m
Overall Height - Rails Up	2.15m
Platform Extension	0.6m
Drive Speed (Lowered/Elevated)	4/0.5km/h
Lift / Lower Time	25/20sec
Gradeability	25%
Max. Slope	1.5°/3°
Machine Weight	970kg

Standards Compliance European EN280









### **Zoomlift Ltd**






# **SS0607E** (Indoor Use)

- Optimization and match of hydraulic system delivers longer lasting performance
- Optimized electronic control system for better brake ability on a long downhill
- Improved steering mechanism reduces tire wear during turning
- Battery powered with zero emission and environmental-friendly

PRODUCT SPECIFICATION	SS0607E
Platform Capacity	230kg
Capacity On Deck Extension	113kg
Platform Occupants (Indoor)	2
Work Height	7.5m
Overall Length	1.53m
Overall Width	0.81m
Overall Height - Rails Down	2m
Overall Height - Rails Up	2.275m
Platform Extension	0.6m
Drive Speed (Lowered/Elevated)	3.8/0.5km/h
Lift / Lower Time	32/27sec
Gradeability	25%
Max. Slope	1.5°/3°
Machine Weight	1,300kg












### **Zoomlift Ltd**

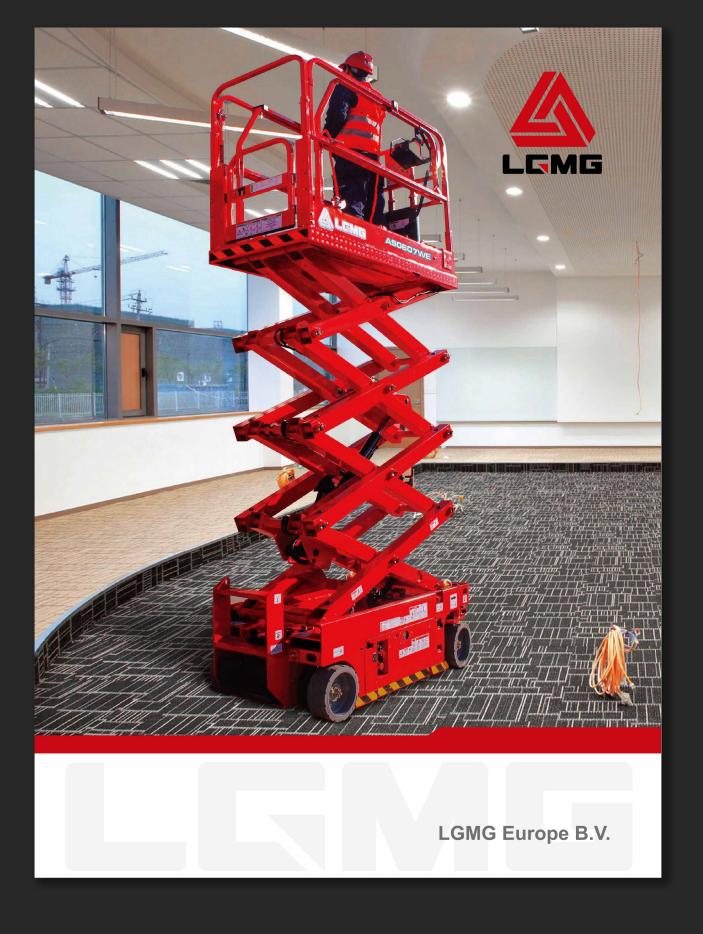



### **ASO607WE** (Indoor Use / Outdoor Use)

- Optimization and match of hydraulic system delivers longer lasting performance
- Optimized electronic control system for better brake ability on a long downhill
- Improved steering mechanism reduces tire wear during turning
- Battery powered with zero emission and environmental-friendly


PRODUCT SPECIFICATION	AS0607WE	AS0607W
Platform Capacity	230kg	230 kg
Capacity On Deck Extension	120kg	120 kg
Platform Occupants (Indoor)	2	2
Work Height	7.8m	7.8 m
Overall Length	1.86m	1.83 m
Overall Width	0.81m	0.81 m
Overall Height - Rails Down	1.84m	1.82m
Overall Height - Rails Up	2.14m	2.12m
Platform Extension	0.9m	0.9 m
Drive Speed (Lowered/Elevated)	4/0.8km/h	3.5/0.8 km/h
Lift / Lower Time	16/28sec	16/28 sec
Gradeability	25%	25%
Max. Slope	1.5°/3°	1.5°/3°
Machine Weight	1,620kg	1,600 kg

Standards Compliance European EN280

# HYDRAULIC MOTOR DRIVE AS0607W (Indoor Use / Outdoor Use)

- Most durable and reliable scissor stacks
- Reinforced working platform
- Advanced charger with voltage protection
- Higher driver comfort and security










### **Zoomlift Ltd**

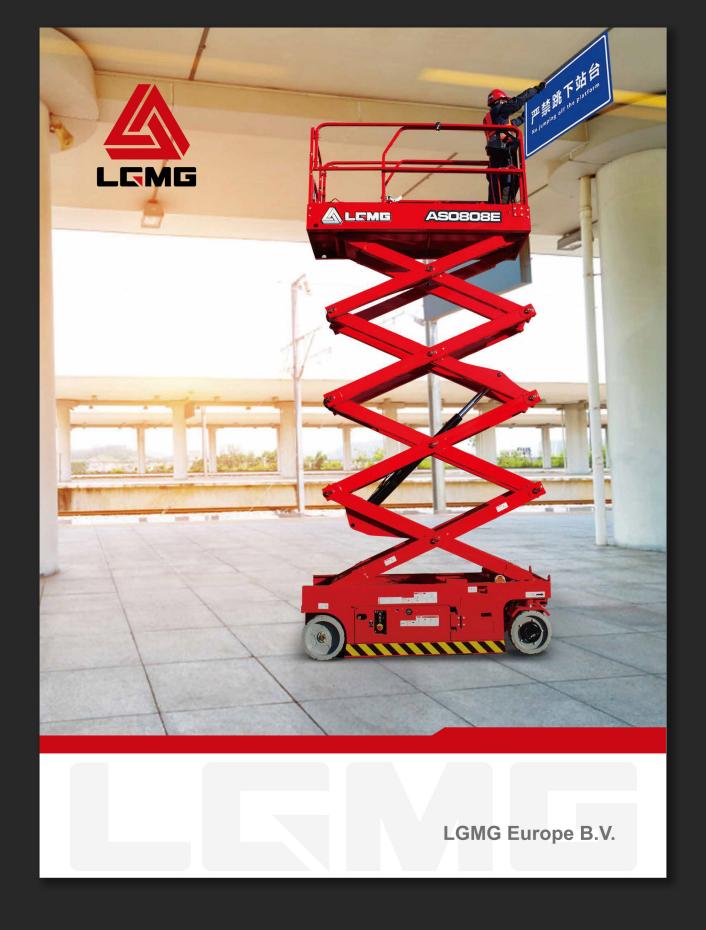



### AS0808E (Indoor Use)

- Optimization and match of hydraulic system delivers longer lasting performance
- Optimized electronic control system for better brake ability on a long downhill
- Improved steering mechanism reduces tire wear during turning
- Battery powered with zero emission and environmental-friendly

PRODUCT SPECIFICATION	AS0808E	AS0808
Platform Capacity	230kg	230 kg
Capacity On Deck Extension	113kg	113 kg
Platform Occupants (Indoor)	2	2
Work Height	10m	10 m
Overall Length	2.4m	2.40 m
Overall Width	0.83m	0.83 m
Overall Height - Rails Down	1.95m	1.95 m
Overall Height - Rails Up	2.32m	2.32m
Platform Extension	0.9m	0.9 m
Drive Speed (Lowered/Elevated)	3.5/0.8km/h	3.5/0.8 km/h
Lift / Lower Time	31/40sec	31/40 sec
Gradeability	25%	25%
Max. Slope	1.5°/3°	1.5°/3°
Machine Weight	2,140kg	2,140 kg

Standards Compliance European EN280

#### HYDRAULIC MOTOR DRIVE

#### AS0808 (Indoor Use)

- Most durable and reliable scissor stacks
- Reinforced working platform
- Advanced charger with voltage protection
- 4Higher driver comfort and security










### **Zoomlift Ltd**

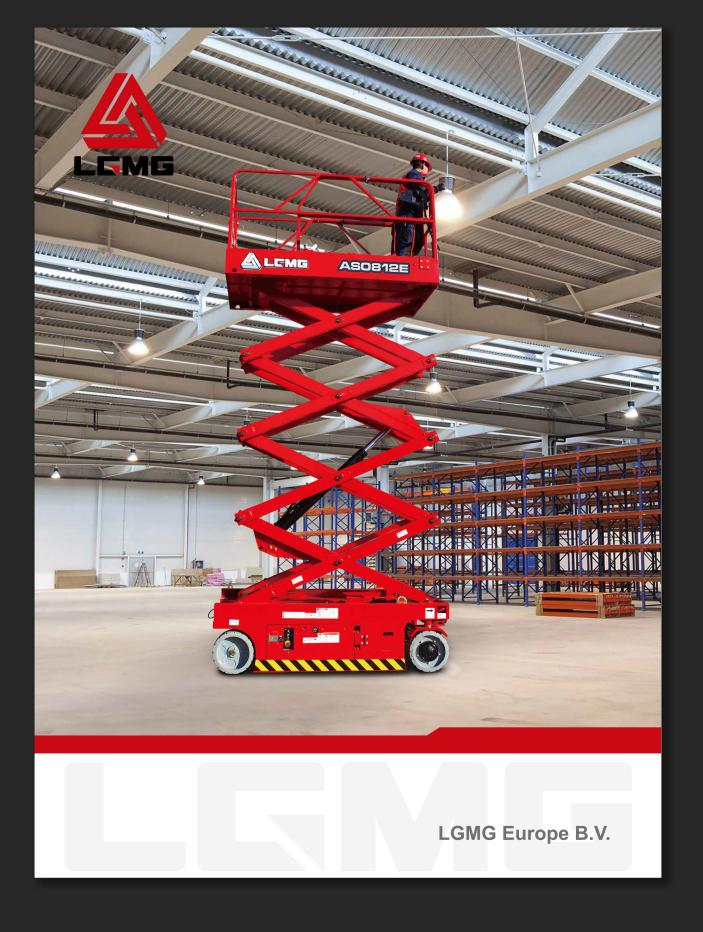



#### **ASO812E** (Indoor Use / Outdoor Use)

- Optimization and match of hydraulic system delivers longer lasting performance
- Optimized electronic control system for better brake ability on a long downhill
- Improved steering mechanism reduces tire wear during turning
- Battery powered with zero emission and environmental-friendly

PRODUCT SPECIFICATION	AS0812E	AS0812
Platform Capacity	450kg	450Kg
Capacity On Deck Extension	113kg	113Kg
Platform Occupants (Indoor)	2	2
Work Height	10m	10m
Overall Length	2.42m	2.42m
Overall Width	1.18m	1.18m
Overall Height - Rails Down	1.73m	1.73m
Overall Height - Rails Up	2.30m	2.3m
Platform Extension	0.9m	0.9m
Drive Speed (Lowered/Elevated)	4/0.8km/h	3.5/0.8Km/h
Lift / Lower Time	35/40sec	35/40sec
Gradeability	25%	25%
Max. Slope	1.5°/3°	1.5°/3°
Machine Weight	2,715kg	2,691Kg

Standards Compliance European EN280

### HYDRAULIC MOTOR DRIVE

#### ASO812 (Indoor Use / Outdoor Use)

- Most durable and reliable scissor stacks
- Reinforced working platform
- Advanced charger with voltage protection
- Higher driver comfort and security










### **Zoomlift Ltd**

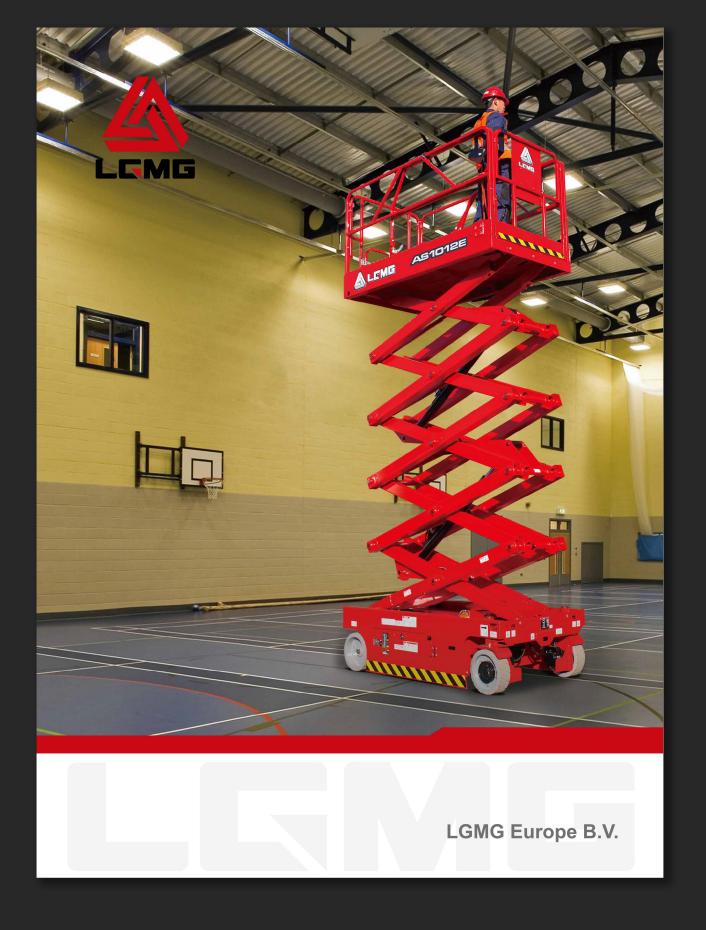



### AS1012E (Indoor Use / Outdoor Use)

- Optimization and match of hydraulic system delivers longer lasting performance
- Optimized electronic control system for better brake ability on a long downhill
- Improved steering mechanism reduces tire wear during turning
- Battery powered with zero emission and environmental-friendly

PRODUCT SPECIFICATION	AS1012E	AS1012
Platform Capacity	320kg	320 kg
Capacity On Deck Extension	113kg	113 kg
Platform Occupants (Indoor)	2	2
Work Height	12m	12 m
Overall Length	2.47m	2.47 m
Overall Width	1.18m	1.18 m
Overall Height - Rails Down	1.86m	1.86 m
Overall Height - Rails Up	2.43m	2.43m
Platform Extension	0.9m	0.9 m
Drive Speed (Lowered/Elevated)	4/0.8km/h	3.5/0.8 km/h
Lift / Lower Time	58/48sec	62/48 sec
Gradeability	25%	25%
Max. Slope	2°/3°	2°/3°
Machine Weight	3,000kg	3,000 kg

Standards Compliance European EN280

#### HYDRAULIC MOTOR DRIVE

#### AS1012 (Indoor Use / Outdoor Use)

- Most durable and reliable scissor stacks
- Reinforced working platform
- Advanced charger with voltage protection
- Higher driver comfort and security










# Zoomlift Ltd

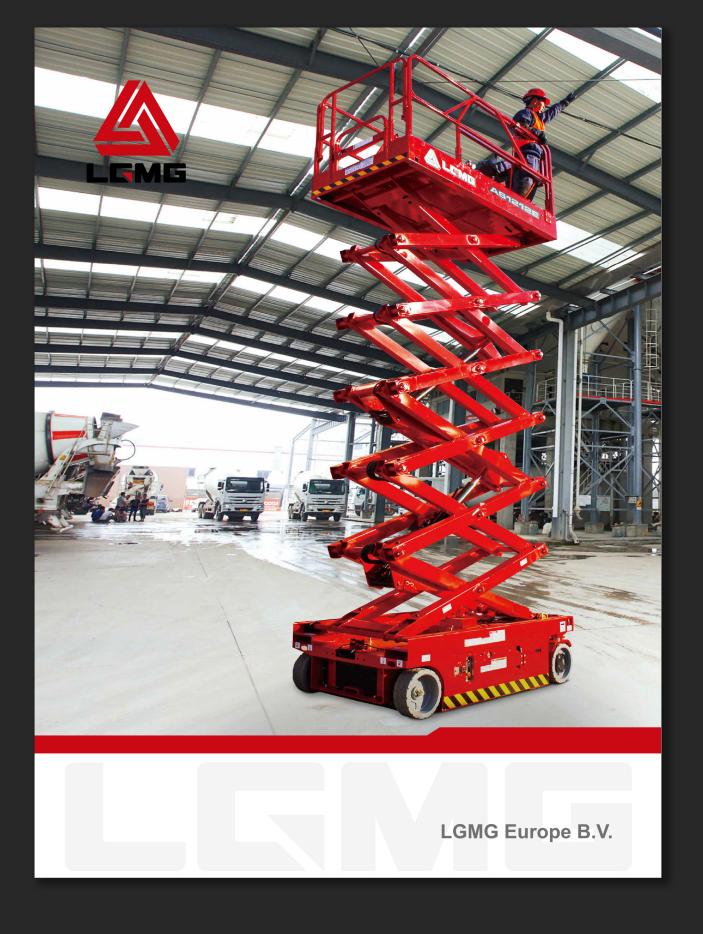



#### AS1212E (Indoor Use)

- Optimization and match of hydraulic system delivers longer lasting performance
- Optimized electronic control system for better brake ability on a long downhill
- Improved steering mechanism reduces tire wear during turning
- Battery powered with zero emission and environmental-friendly

PRODUCT SPECIFICATION	AS1212E	AS1212
Platform Capacity	320kg	320 kg
Capacity On Deck Extension	113kg	113 kg
Platform Occupants (Indoor)	2	2
Work Height	14m	14 m
Overall Length	2.47m	2.47 m
Overall Width	1.18m	1.18 m
Overall Height - Rails Down	1.99m	1.99 m
Overall Height - Rails Up	2.56m	2.56m
Platform Extension	0.9m	0.9 m
Drive Speed (Lowered/Elevated)	4/0.8km/h	3.1/0.8 km/h
Lift / Lower Time	58/60sec	65/60 sec
Gradeability	25%	25%
Max. Slope	1.5°/3°	1.5°/3°
Machine Weight	3,300kg	3,300 kg

Standards Compliance European EN280

#### HYDRAULIC MOTOR DRIVE

#### AS1212 (Indoor Use)

- Most durable and reliable scissor stacks
- Reinforced working platform
- Advanced charger with voltage protection
- Higher driver comfort and security









### **Zoomlift Ltd**