



HR15

SELF PROPELLED ACCESS PLATFORM



15.6m (51ft 6in)
Working height

9.3m (31ft)
Unrestricted working
outreach at 225kg

**Proportional
Multi-Function Control**
Fast & precise operation


Superb Manoeuvrability
3.70m Turning Radius

GVW From Only 4,500kg
Lowest weight in its class

SiOPS® as Standard
Award winning
operator protection

**180° Platform Rotation
& 150° Fly-Boom**
Improved access to applications

TIER IV Engine
Versatile, fuel efficient &
environmentally conscious



Sales & Rental of New & Used Access Platforms, Forktrucks & Telehandlers

Zoomlift Ltd

Orchard House, Windmill Hill, Pudsey, Leeds, LS288JQ

T: 0333 011 3343

E: andrew@zoomlift.co.uk

nifty HR15


The super-low-weight **Height Rider 15 (HR15)** is available as a Diesel or Hybrid powered 4-wheel-drive (4x4) and offers one of the best working envelopes in its class. Its compact base allows it to manoeuvre easily in restricted areas and its very low overall weight helps to minimise transportation costs. The 1.80m wide cage provides more room for materials and tools and a 150° fly-boom with 180° cage rotation helps to increase accuracy when positioning.

The **Diesel** version incorporates a versatile and efficient **TIER IV** compliant engine to deliver maximum traction and gradeability, making it ideal for rough or uneven ground.

The **Hybrid** version offers maximum efficiency and environmental consciousness. An electric only mode allows **zero-emission** operation for clean or noise sensitive applications while the Hybrid mode with **TIER IV** compliant engine and catalytic converter minimises fuel consumption and exhaust emissions, and with Diesel 'Re-Gen', is capable of running 24/7 for unbeatable utilisation.

SAFETY FEATURES

- SiOPS*
- Tilt Alarm
- Solid Tyres
- Dual Harness Points
- CE Mark
- Automatic Fail-Safe Brakes
- Lock Valves on all Hydraulic Cylinders
- Powered Auxiliary Descent
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)

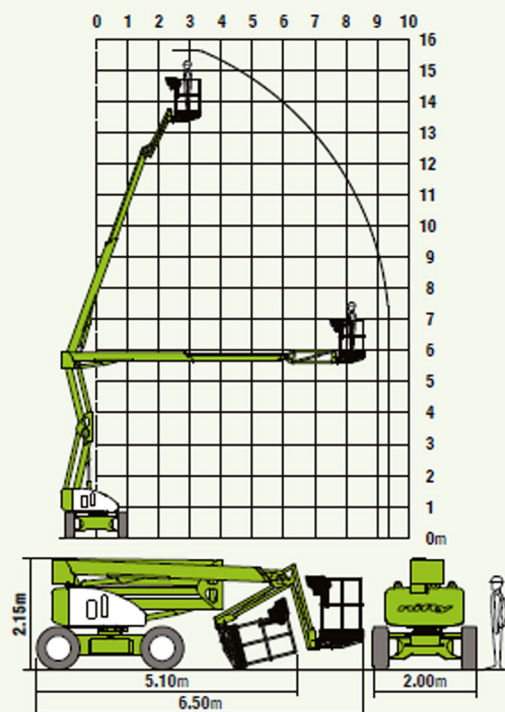

The tough, impact-resistant composite base and larger cross-section steel rails of the HR15's **ToughCage** give extra strength and durability and the multi award winning **SiOPS*** provides additional operator protection.




SPECIFICATIONS

Working Height	15.60m	51ft 6in
Platform Height	13.60m	45ft
Working Outreach	9.30m	31ft
Slew	360°	
Fly-Boom Arc	150°	
Width	2.00m	6ft 7in
Height	2.15m	7ft
Length - Stowed	5.10m	16ft 9in
- Overall	6.50m	21ft 4in
Minimum Weight - Diesel	4,500kg*	9,900lbs*
- Hybrid	4,750kg*	10,500lbs*
Turning Radius (Outside)	3.70m	12ft 2in
Platform Rotation	180°	
Platform Capacity	225kg	500lbs
Platform Size	1.80m x 0.85m	5ft 11in x 2ft 9in
Drive Speed	6.6km/h	4.1mph
Gradeability	45% (24°)	
Power System - Diesel	Diesel (Kubota 1105 - 25Hp/18.5kW)	
- Hybrid	Battery & Diesel (Kubota 722 - 18Hp/14kW)	

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



Zoomlift Ltd

Orchard House, Windmill Hill, Pudsey, Leeds, LS288JQ

T: 0333 011 3343

E: andrew@zoomlift.co.uk

Sales & Rental of New & Used Access Platforms, Forktrucks & Telehandlers